


PROSKIRTING FLAT

ANODISED, BRUSHED,
VARNISHED ALUMINIUM

PROSKIRTING FLAT is the new innovative skirting designed with an integrated system for plasterboard walls, and devised to create a skirting flush to the wall for a modern and contemporary touch.



EXAMPLE AND INSTRUCTIONS FOR LAYING METHODS

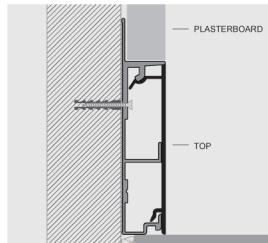

1. Fix the substrate/perforated base to the wall before laying the plasterboard, calculating all the heights and distances. 2. Lay the plasterboard aligning the lower part flush to the PROSKIRTING CHANNEL and/or FLAT. 3. Plaster and carry out the surface finishing on the plasterboard. 4. Choose the required Top PROSKIRTING CHANNEL and/or FLAT finish, cut and lay the profile fitting the lower part and then the upper part by pressing gently.

IMPORTANT: Pay attention to the external edges of the aluminium PROSKIRTING. They must be protected against agents such as adhesives and sealants and against grinding or scraping actions.

SUPPORT/ PERFORATED BASE - ANODISED SILVER ALU. thermo packed - bar length 2 LM - pack. 20 Pcs - 40 LM

Article	H mm		
PKGCFAA 75	75		

ORDER THE SUPPORT AND THE TOP YOU WISH

VISIBLE TOP - ANODISED, BRUSHED, WHITE VARNISHED ALUMINIUM thermo packed

bar length 2 LM - pack. 20 Pcs - 40 LM


Article	H mm		
PKFLAA 60	60		
PKFLBS 60	60		
PKFLA 60-01	60		

UPON REQUEST MAY BE REALISED IN OTHER FINISHES OF THE COLOUR CHART. CONTACT OUR CUSTOMER SERVICE FOR MINIMUM QUANTITY, TIMING AND PRICE.

OUTSIDE CORNER - ANODISED, BRUSHED, WHITE VARNISHED ALUMINIUM
pack. 5 Pcs

Article	H mm		
REPKFL... 60	60		
REPKFLA60-01	60		

Available in the finish: AA - BS - 01. The code of the selected colour must be added to the article code.
E.g.: REPKFL... 60 (chosen colour Anodised silver) REPKFLAA 60.

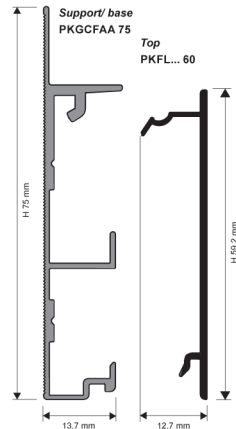

COLOURS

